


EXCELLENCE IS OUR EXPERTISE

CAMERAS
GAUGES
LAMPS
SIGNAL LAMPS
CAN BUS KEYPADS
AUTOMOTIVE WIRE
WARNING BEACONS
SENSORS
MOTORS
DISPLAYS
INDICATORS
COLUMNS
SEATS
STEERING WHEELS
WIPER ARMS
WIPER BLADES
MIRRORS
CONTROLLERS
PEDALS
JOYSTICKS
ISOLATION STATIONS
AUX POWER DISTRIBUTION
FUSES
BREAKERS
CONNECTORS
TERMINALS
ARMRESTS
LOCKS
LEVERS
SWITCHES
FUSE BOXES
RELAYS
SWITCHES
SOCKETS
WINCHES

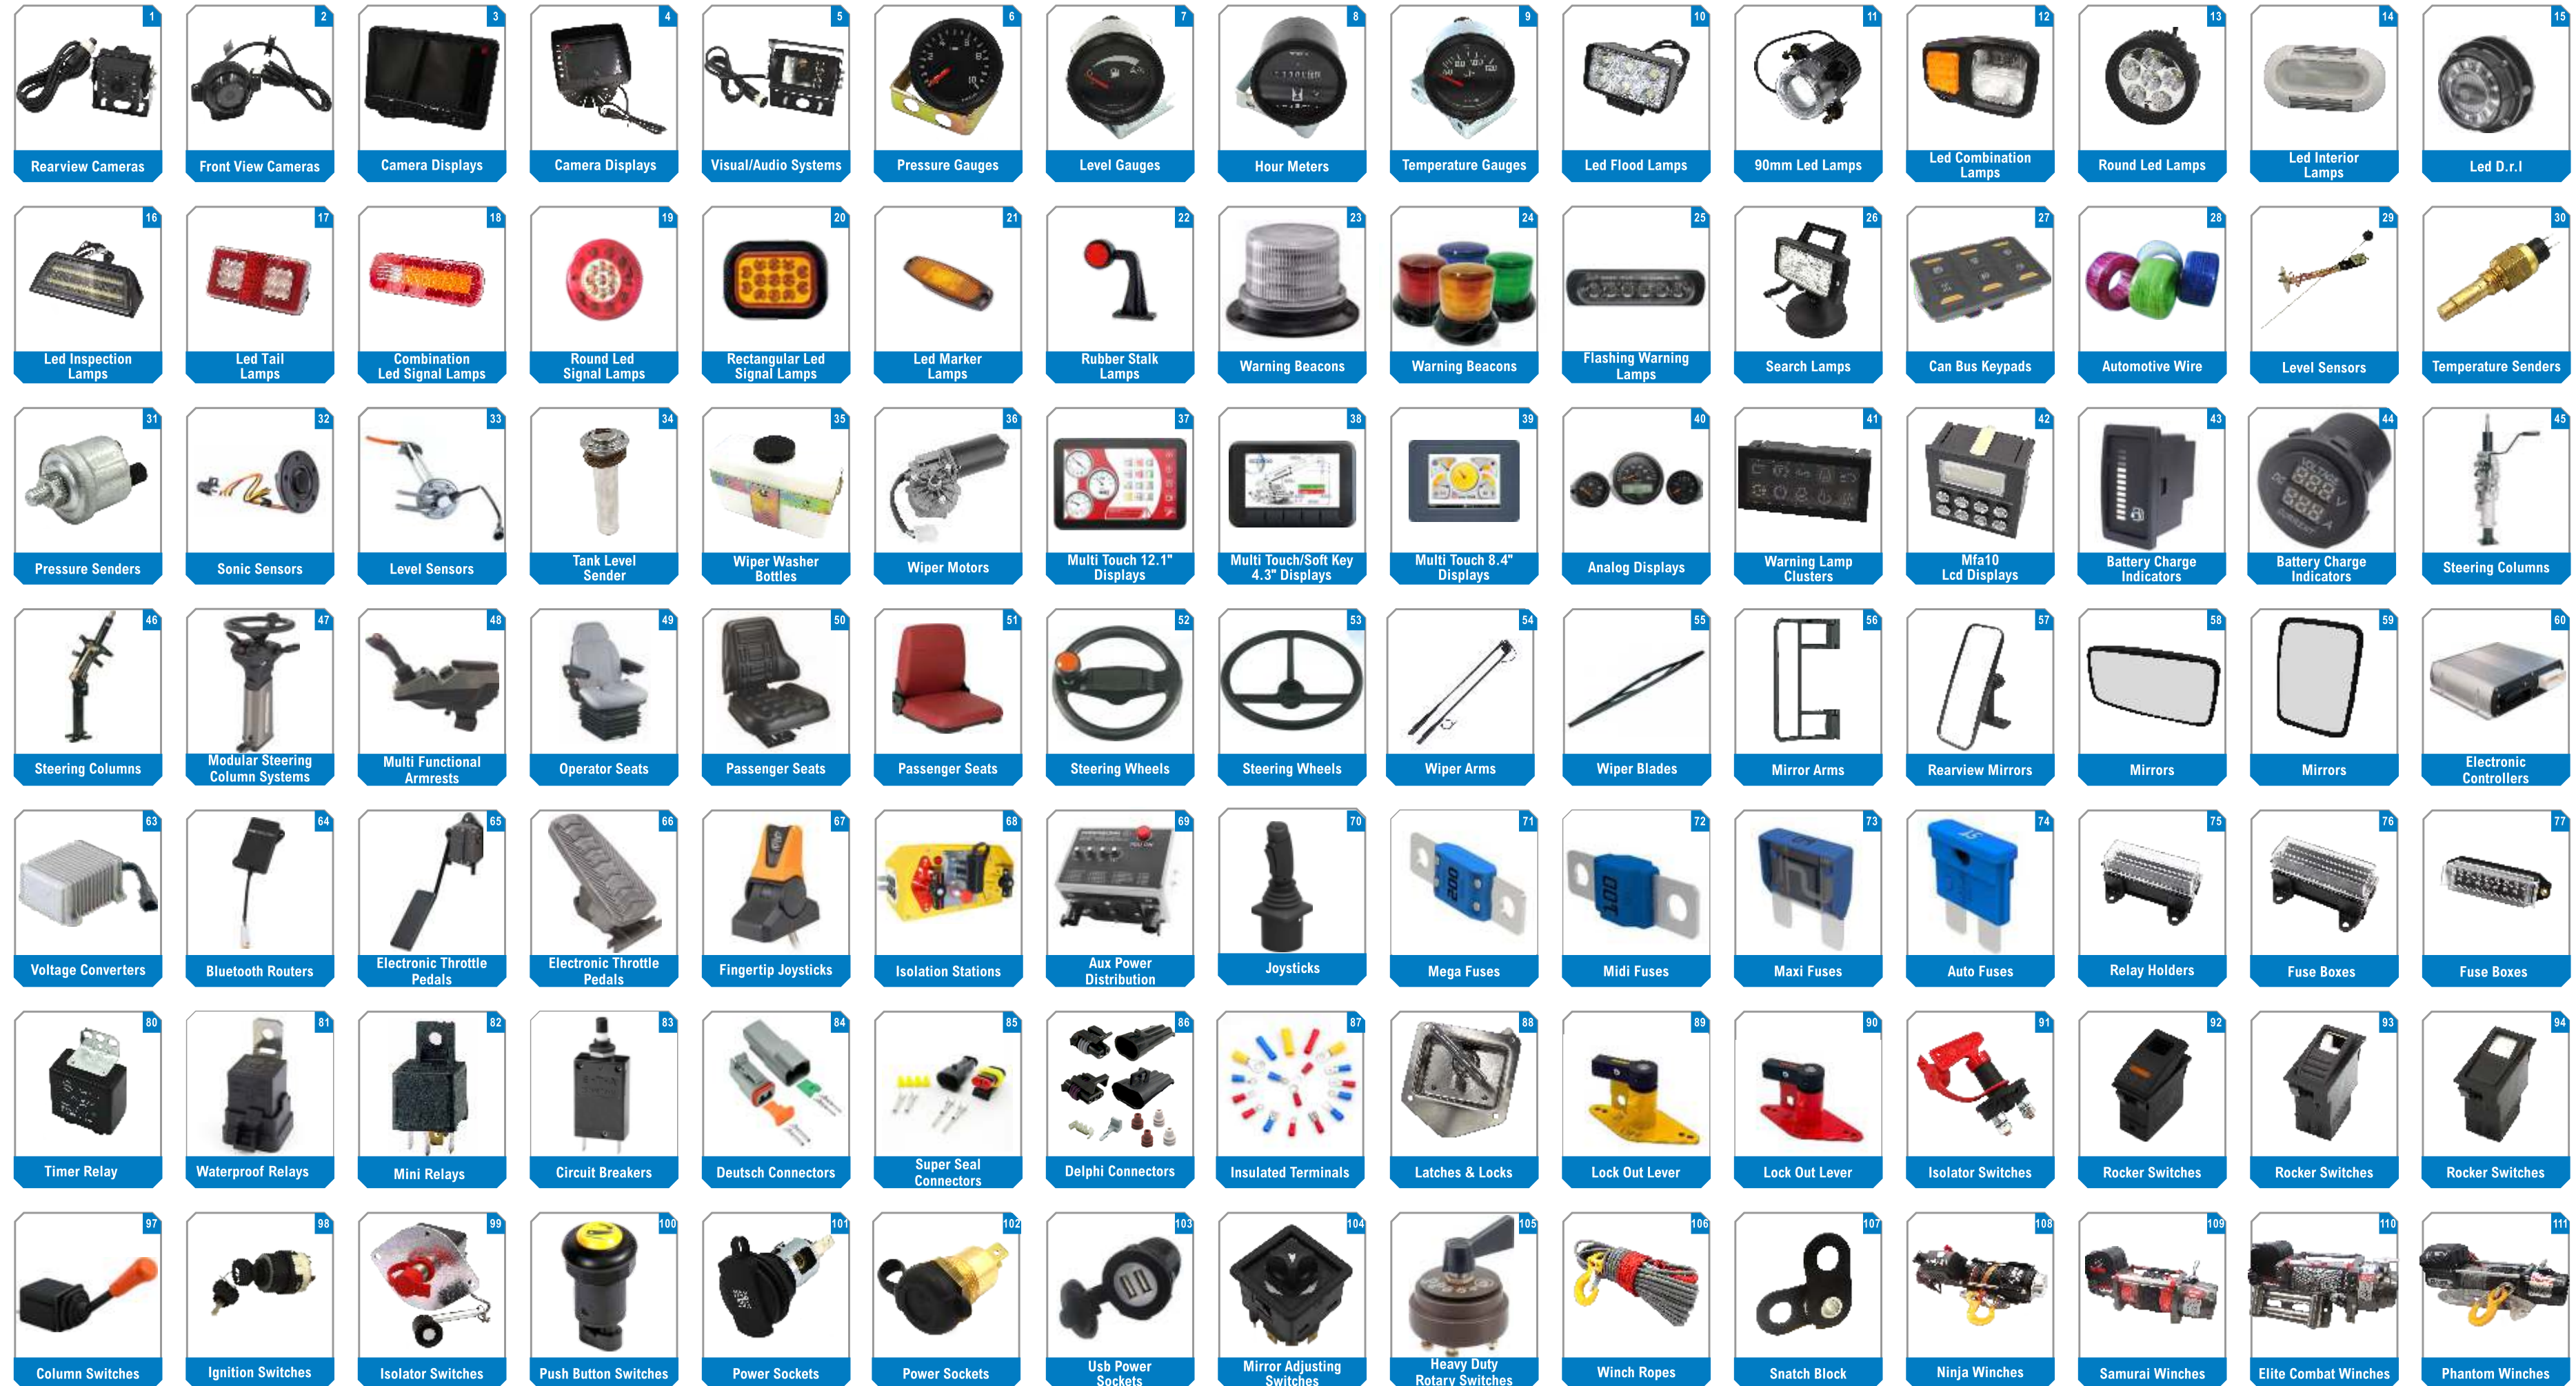

WHAT WE DO BEST

- Heavy duty starter motors.
- Heavy duty alternators.
- Remote Pre-lube pumps.
- Component remanufacturing.
- Electrical harness manufacturing.
- Harness braiding services.
- Component Manufacturing.
- Electronic control and multiplexing systems.
- Machine and engine monitoring systems.
- Power distribution.
- 24/7 Field services.
- Essential field service kits.
- Connectors and terminals.
- Camera and rear-view systems.
- LED lamps and bulbs.
- Mine spec fitments.
- Gauges.
- Horns and alarms.
- Hoists and Winches.
- Consumables.
- OEM parts.





Flood: 103-142-8060
Spot: 103-142-8061



Spot: 103-142-7060



Flood: 103-142-8160



Flood: 103-142-8140
Spot: 103-142-8141



Flood: 103-142-8260
Zero Glare LED Work Light

SPECIFICATIONS:

Power	60W	Power	60W	Power	60W	Power	40W	Power	60W
Voltage range	9-32V	Voltage range	9-32V	Voltage range	9-32V	Voltage range	9-32V	Voltage range	9-32V
Luminous flux	5100LM	Luminous flux	4800LM	Luminous flux	5400LM	Luminous flux	3600LM	Luminous flux	5100LM
Light type	6pcs 10W Ostram LEDs	Light type	6pcs 10W Ostram LEDs	Light type	6pcs 10W Ostram LEDs	Light type	4pcs 10W Ostram LEDs	Light type	Zero Glare
Waterproof rate	IP69K	Waterproof rate	Ip68	Waterproof rate	IP69K	Waterproof rate	IP69K	Waterproof rate	Ip68
Material	PC lens	Material	PC lens	Material	PC lens	Material	PC lens	Material	PC lens, ADC Aluminium alloy housing 4mm 304 stainless steel bracket
Operating temperature	-45C-+85C	Operating temperature	-45C-+85C	Operating temperature	-45C-+85C	Operating temperature	-45C-+85C	Operating temperature	-45C-+85C
Beam	flood and spot beam 15 degree optional	Beam	flood and spot beam optional	Beam	flood beam 85 degree and spot beam 10 degree optional	Beam	flood beam 85 degree and spot beam 10 degree optional	Beam	Zero Glare
Material of housing	aluminum alloy	Material of housing	aluminum alloy	Material of housing	aluminum alloy	Material of housing	aluminum alloy	Bolt Size	M8*25(2Pcs), M10*25(1Pc)
EMC CISPR 25 - Class 4		EMC R10 approval		Colour Temperature : 6000K Vibration up to 60G		Colour Temperature : 6000K Vibration up to 60G		EMC/EMI rating	
				EMC CISPR 25 - Class 5		EMC CISPR 25 - Class 5		Vibration	
								up to 60G	

